

Low Profile Button Temperature Sensor


The Low Profile "Button" Sensor is ideal for locations where aesthetics are as important as the temperature measurement.



The inconspicuous wall sensor mounts easily by pushing through a 12mm hole and secured with a peel-off insulating adhesive ring. The only visible portion is a flush 22mm dot on the wall.

Features & Options:

- Small flush sensor mounting
- Accurate direct air measurement
- Paintable with latex or oil base products
- Discreet and unobtrusive
- Suitable for bathrooms/ wet rooms
- Compatible with all thermostats with external sensing option

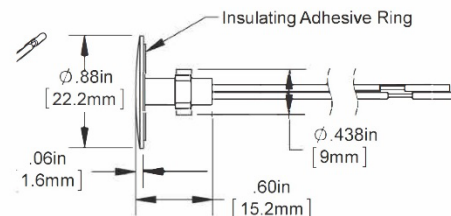

10K-2 - Resistance Table

°F	°C	Ohms	°F	°C	Ohms	°F	°C	Ohms
-39	-39.44	323839	37	2.78	28365	113	45	4367
-37	-38.33	300974	39	3.89	26834	115	46.11	4182
-35	-37.22	279880	41	5	25395	117	47.22	4006
-33	-36.11	260410	43	6.11	24042	119	48.33	3838
-31	-35	242427	45	7.22	22770	121	49.44	3679
-29	-33.89	225809	47	8.33	21573	123	50.56	3525
-27	-32.78	210443	49	9.44	20446	125	51.67	3380
-25	-31.67	196227	51	10.56	19376	127	52.78	3242
-23	-30.56	183068	53	11.67	18378	129	53.89	3111
-21	-29.44	170775	55	12.78	17437	131	55	2985
-19	-28.33	159488	57	13.89	16550	133	56.11	2865
-17	-27.22	149024	59	15	15714	135	57.22	2751
-15	-26.11	139316	61	16.11	14925	137	58.33	2642
-13	-25	130306	63	17.22	14180	139	59.44	2538
-11	-23.89	121939	65	18.33	13478	141	60.56	2438
-9	-22.78	114165	67	19.44	12814	143	61.67	2343
-7	-21.67	106939	69	20.56	12182	145	62.78	2252
-5	-20.56	100218	71	21.67	11590	147	63.89	2165
-3	-19.44	93909	73	22.78	11030	149	65	2082
-1	-18.33	88090	75	23.89	10501	151	66.11	2003
1	-17.22	82670	77	25	10000	153	67.22	1927
3	-16.11	77620	79	26.11	9526	155	68.33	1855
5	-15	72911	81	27.22	9078	157	69.44	1785
7	-13.89	68518	83	28.33	8653	159	70.56	1718
9	-12.78	64419	85	29.44	8251	161	71.67	1655
11	-11.67	60592	87	30.56	7866	163	72.78	1594
13	-10.56	57017	89	31.67	7505	165	73.89	1536
15	-9.44	53647	91	32.78	7163	167	75	1480
17	-8.33	50526	93	33.89	6838	169	76.11	1427
19	-7.22	47606	95	35	6530	171	77.22	1375
21	-6.11	44874	97	36.11	6238	173	78.33	1326
23	-5	42317	99	37.22	5960	175	79.44	1279
25	-3.89	39921	101	38.33	5697	177	80.56	1234
27	-2.78	37676	103	39.44	5447	179	81.67	1190
29	-1.67	35573	105	40.56	5207	181	82.78	1149
31	-0.56	33599	107	41.67	4981	183	83.89	1109
33	0.56	31732	109	42.78	4766	185	85	1070

Mounting: 12MM HOLE, PUSH IN PLASTIC SHEATH WITH PEEL-OFF INSULATING ADHESIVE RING

Tenways Engineering Services Ltd
 85 Kenilworth Road, Edgware, London, HA8 8XA, United Kingdom
www.tenways.co.uk
www.climatesync.co.uk
 Email: controls@tenways.co.uk
 +44 20 8203 1105